

Crossfader Removal

1. Remove the two mounting screws (see figure 1) with a #1 Phillips screwdriver.
2. Pull the crossfader assembly out about 6" (15 cm).
3. Unplug the ribbon cable from the unit (see figure 2).
4. Place the old crossfader on a table, in the trash, or hang it on the wall, but **do not place it next to your new crossfader**, or you might re-install the old one by mistake.

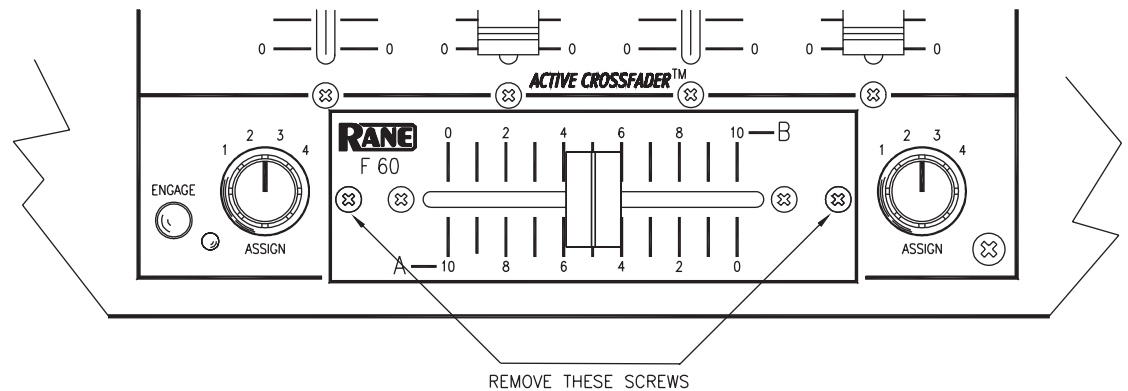


Figure 1

Crossfader Installation

1. Set the new replacement crossfader in front of the mixer.
2. Plug the ribbon cable into the mixer (see figure 2) with the red stripe on the ribbon cable **to the right**.
3. Place the crossfader assembly onto the unit.
4. Install the two new mounting screws, supplied with the replacement crossfader (see figure 1).

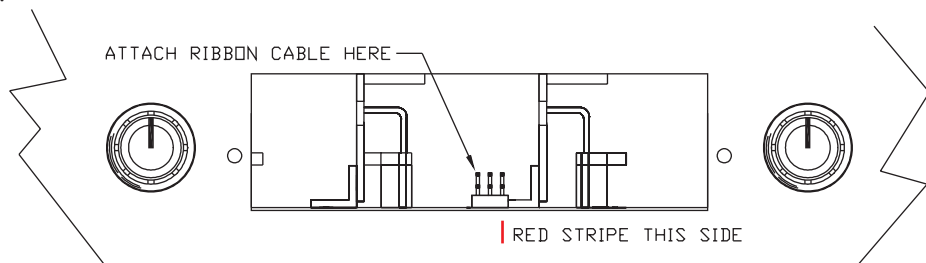


Figure 2

WARNING: This product may contain chemicals known to the State of California to cause cancer, or birth defects or other reproductive harm.