

### Fader Removal

1. Remove the three fader knobs by gently pulling up.
2. Remove the four screws securing the cover plate (see Figure 1) with a #1 Phillips screwdriver.
3. Carefully remove cover plate.
4. Remove the two mounting screws (shown in Figure 2) with a #1 screwdriver, while holding the fader in place.
5. Slide fader to one side and bring through hole in panel.
6. Remove ribbon cable from the fader assembly.

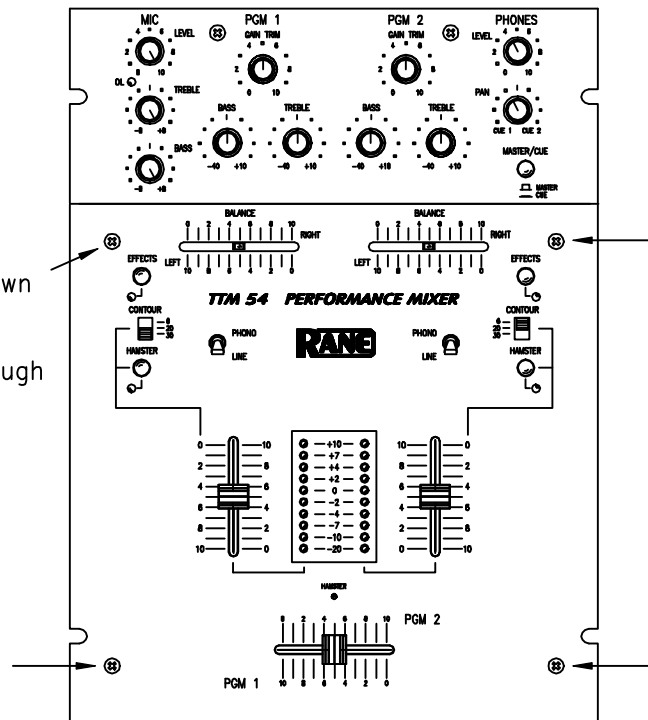


Figure 1

### Fader Installation

1. Plug ribbon cable onto fader assembly.
2. Feed replacement fader through hole.
3. While holding fader in place, install the two mounting screws supplied with the replacement fader. (see Figure 2)
4. Carefully place the cover plate back onto unit.
5. Install the four new mounting screws supplied with the replacement fader. (see Figure 1).
6. Place the three knobs back onto the faders.

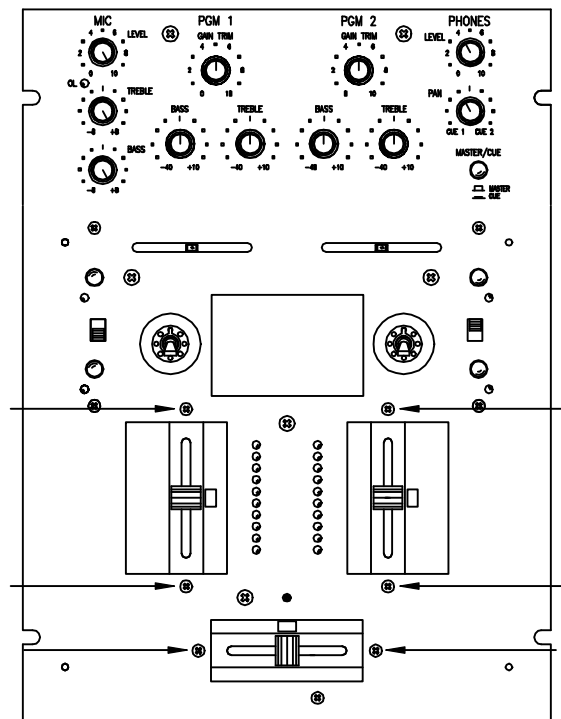


Figure 2

**WARNING:** This product may contain chemicals known to the State of California to cause cancer, or birth defects or other reproductive harm.

102401